

Touch Screen Control WizPanel-1

- **Compact Size**
- For table top or wall mounted design
- **16 Capacitive Touch Switches**
- Customization of the button controls
- **Build-in processor**
- IR learner with RS232, RS485 and IR ports
- **User-Friendly programming software**
- **Applications:**
Home Automations, Classroom Controls, Corporate Applications, Churches Automations, Hotel Rooms, Conference Rooms etc



Specifications

- | | |
|------------------------------|---|
| • Buttons | 16 Capacitive Touch Switch LED indicators with backlight |
| • Communication Ports | Ports 2 X RS-232, 2 X RS-485, 2 X IR port |
| RS-232 | Even/ Odd. 9600, 19200, 38400 and stop bits |
| RS-485 | Multidrop |
| IR Ports | Build-In IR learner and Transmitter |
| • Control Mode | |
| i) Toggle | - LED will blink and codes will be transmitted |
| ii) ON/OFF | - LED will toggle between ON and OFF |
| iii) Grouping | - Only one button in the group will be lighted |
| iv) Marco | - A sequence of commands will be transmitted with a delay of 2 seconds per button |
| • Programming | RS232 |
| • Power Supply | 12V DC Power Adapter |
| • Dimensions | 140 x 86 x 28.5 mm |
| • Weight | 160 gm |

Optional Accessories

● Control Module WP-MO1

Control interface for WizPanel to various Input/Output boards for automation process.

Specification :

Input : 12VDC

Communication : Daisy Link RS232 (looping)

Selectable ID using Dip switch


Able to link up to 4 accessories board (4 sets of MO-1 for one WizPanel)

● Relay Module WP-MR1

Relay I/O board for AC or DC control

Specification :

External and Internal Power Input : 12 VDC

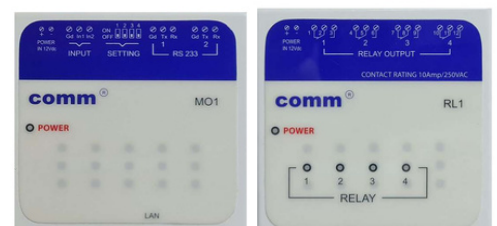

All products information and specifications are subject to changes without prior notice.